

VII NUCLEAR FISSION AND RADIATION PROTECTION (5)

B. Chmielarz, W. Gudowski, Y. Hrabar, Congjin Ding, Jiali Zou,	
B. Chmielarz, Congjin Ding, Jiali Zou, A. Bidakowski	
Advanced simulation tool of nuclear fuel cycle	VII-267
Zs. Tóth	
Analysis of the cross section function of Cd-113 in the cold neutrone energy range.....	VII-268
A. Graževičius	
Numerical investigation of the thermal hydraulic phenomena in a rectangular enclosure	VII-269
D. Lunov, S. Alyokhina	
Thermal state of WWER-1000 spent fuel assemblies at the dry interim storage	VII-277
Zs. Tóth	
Calculating the correction cross section function of NON 1/V nuclei in cold neutron beam measurements.....	VII-285

VIII COMBUSTION AND PLASMA PROCESSES (9)

D. Gimžauskaitė, A. Tamošiūnas, M. Aikas, R. Uscila, J. Samosionokas	
The use of thermal plasma for the treatment of soil contaminated by petroleum hydrocarbons	VIII-286
A. Liavonchyk, D. Morozov, V. Sauchyn, H. Dalholenka	
Numerical modelling of plasma reactor for gasification of wastes with predominant organic part	VIII-293
A. Šuopys, V. Grigaitienė	
The review of plasma spray parameters effect on the structure of the coatings	VIII-304
P. N. Shoronov	
Investigation of compression erosion plasma flow generated by a compact accelerator.....	VIII-313
V. V. Leschevich, O. G. Penyazkov, S. Yu. Shimchenko	
Autoignition of decane/air mixture in the rapid compression machine at intermediate temperatures	VIII-319
S. Mertdinc, N. I. Ünal, H. Haykiri-Açma, S. Yaman	
Investigation of kinetic parameters for combustion of pet bottle caps with lignite	VIII-325
M. Sadeckas, N. Striūgas	
Investigation of flame monitoring and Na*, K*, Ca* radicals emission during combustion of biomass particle.....	VIII-331
K. A. Viazava	
Possibility of flame temperature measurements by photoemission method	VIII-338
A. Saliamonas, R. Navakas, N. Striūgas, A. Džiugys, K. Zakarauskas	
Research of CH ⁺ chemiluminescence intensity dependence on execess air ratio in premixed natural and producer gas flame.....	VIII-343

IX THERMAL PHYSICS, FLUID MECHANICS AND METROLOGY (6)

V. Kulkovas	
Waste heat recovery from flue gases in flue gas condensers	IX-351
V. G. Rifert, V. V. Gorin, P. A. Barabash, A. S. Solomakha, V. V. Sereda	
Substantiation and the range of application of a new method for heat transfer prediction in condensing inside plain tubes	IX-352
P. Vilkinis, N. Pedišius	
Parametric analysis of recirculating flow dynamics in microcavity	IX-353
E. Misiulis, A. Džiugys	
Investigation of a complex fluid-structure interaction problem in a patient specific ophthalmic artery using fiber-reinforced artery wall constitutive model	IX-360
D. P. Kasymov, M. V. Agafontsev, V. V. Perminov	
Estimation of the influence of wood-fire retardants on fire behavior of some types of wood construction materials.....	IX-368
G. Skarbalius, E. Misiulis, A. Džiugys, L. Vorotinskienė	
Numerical modeling of wood chips packed bed drying	IX-374

X MATERIALS SCIENCES AND TECHNOLOGY (14)

M. Kubel, N. Czuma, P. Baran, K. Zarębska, B. Samojeden	
Preliminary studies of selected calcium fly ashes as the substrates of geopolymers material	X-383

ESTIMATION OF THE INFLUENCE OF WOOD-FIRE RETARDANTS ON FIRE BEHAVIOR OF SOME TYPES OF WOOD CONSTRUCTION MATERIALS

D. P. Kasymov, M. V. Agafontsev, V. V. Perminov

Tomsk State University

Lenin Ave. 36, 634050 Tomsk – Russia

Email: denkasymov@gmail.com

ABSTRACT

In this paper the effect of fire front on the surface of wood samples (pine, aspen and larch) was presented to estimate the effect of different wood-fire retardants. Infrared thermography was used as a diagnostic method. Modern methods of IR-diagnostics and the use of thermal imagers eliminate the need for a large number of thermocouples, which perturb the investigated medium during measurements. At the same time, a much better resolution in space and time can be obtained using infrared diagnostics. The surface temperature distribution was obtained for the test wood samples after exposure to a fire front that was modeled using pine needles. The ignition probability was estimated for the chosen experimental parameters for each kind of wood. In the infrared region the sample surface characteristics were recorded using a thermal imager JADE J530SB with a 2.5–2.7 micron optical filter that allowed a temperature to be measured in the range of 500–850 K. In order to record a temperature in the range of 293–550 K, the recording was conducted without a filter. The fire hazard characteristics of wood after fire retardant treatment showed a significant reduction in the surface temperature and the resistance to fire for the chosen parameters of the experiment compared to the same untreated samples.

Keywords: wildfires, infrared diagnostics, fire behaviour, wood-fire retardants, construction materials

1. INTRODUCTION

The problem concerning wildland fires becomes more urgent. All countries of the world, especially Brazil, Australia, China, Greece, Portugal, the United States and Russia are faced with this problem.

Wildland fires are known to be a powerful, natural and anthropogenic factor that significantly changes the condition of forests. Tens of thousands of hectares of forests and lands burn out. Often fires occur and develop near settlements and cities. In Russia, where forests occupy a large territory, forest fires are a national problem, and damage to the real economy is estimated at tens and hundreds of millions of dollars per year.

In the literature there are a lot of experimental studies concerning the fire hazard of wood, which demonstrate the influence of various factors on the fire hazard indices (species of wood, conditions and duration of operation, humidity, fire intensity, etc.) [1–7]. In these works the pyrolysis and thermal oxidative degradation of wood are studied, thermal and physical characteristics are determined, and the values of carbonization rates are obtained for various temperature modes. These data can be used to evaluate the fire resistance of wooden structures, but most of the methods applied to assess the fire hazard of wood are referred to contact methods (micro thermocouple techniques, molecular-beam mass spectrometry, thermal analysis methods, etc.). Contact methods are often used for recording temperature fields, heat fluxes, carbonization rates, ignition delays, etc. to model combustion processes under laboratory conditions; however, a large number of thermocouples are required to record temperature fields under field and semi-field conditions, which causes difficulties for processing the results.

At present, thermal imaging equipment is not often used in the study of wildland fires, since this method application depends on a large number of parameters and requires a detailed study of a

radiation coefficient. It should be noted that information on the application of contactless methods in the fire tests of building fragments and structures [8], as well as the application of IR thermography in the study of urban and peat fires [9–10] are still in lack in the literature. Contact methods are the traditional methods for measuring the temperature during fire-engineering tests of building structures.

In this paper, the effect of various flame retardants was evaluated to study the influence of the fire front on the surface of wood building material samples. Preliminary results of the experiments are presented in [11, 12]. IR thermography was used as a diagnostic method. At present, the IR method, along with thermal non-destructive testing methods which do not cause damage to the integrity of controlled objects and do not introduce disturbances into the process, represents innovative research area that combines achievements in the theory of heat transfer, IR technology, and computer processing of experimental data [13].

2. METHODOLOGY OF THE EXPERIMENT

Combustion, simulated by forest fuel (FF), consisted of pine needles (*Pinus Pinaster*) and represented a site with a width that was close to the size of the wood sample. The samples of pine, aspen and larch were used as the samples which imitated the wood used in constructions. The dimensions of the samples in the experiment were ($L \times W \times H$): $0.23 \times 0.02 \times 0.1$ m for pine, $0.17 \times 0.02 \times 0.1$ m for aspen, and $0.16 \times 0.02 \times 0.12$ m for larch.

Fig. 1 shows a scheme of the experiment:

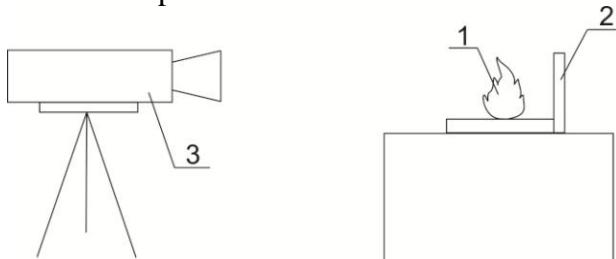


Fig. 1. Experimental setup. 1 – site with FF, 2 – wood sample, 3 – thermal imager JADE J530SB

A wood building material, in addition to the available flat pine, aspen and larch samples [14–15], was used to imitate a pine bar (“Blockhouse”) for evaluating the effect of the geometry of wood samples on ignition, as well as the effect of flame retardants on fire hazard characteristics. The size of the samples in the experiment was ($L \times W \times H$): $0.25 \times 0.02 \times 0.11$ m. Fig. 2 shows a photograph of the building material sample used for imitating a bar.



Fig. 2. “Blockhouse” samples

The non-contact method presented in [14–15] was used to determine the temperature fields on the surface of the studied wood samples subjected to the model forest fire. A continuous thermal

imaging survey of 50 FPS. The survey was conducted within 5 minutes from the moment of ignition of the forest combustible material.

The following solutions were considered: fire-bio retardant treatment for wood “FUKAM” [16], fire retardant treatment with an antiseptic effect for wood “Pirilax-Classic” [17], a fire retardant “SENEZH OGNEBIO PROF” [18], as well as a fire-retardant composition “MIG-09” [19].

The consumption of fire-retardant compositions, as determined by the manufacturer's technical specifications, guaranteed the II group of fire-retardant efficiency (The second group corresponds to incombustible materials that burn or smolder only if there is a source of fire. After its removal, the combustion stops) in accordance with GOST R53292 [20]. The sample surface subjected to the thermal action of the combustion front was uniformly coated by a flame retardant composition with a brush. The samples were kept for 24 hours and then were placed in a drying oven ShSP-0.5 – 200 at a temperature of 70 °C until the moisture content was W = 2%. Moisture content of the samples is controlled by the moisture analyzer AND MX-50 with an accuracy of 0.01%, the weight of the samples is controlled by the electronic scale AND HL-400 with an accuracy of 0.01 g.

3. RESULTS AND DISCUSSION

The use of the non-contact method allowed us to obtain the distribution of the temperature fields on the surface of the sample subjected to the combustion source.

The analysis of the data obtained for untreated wood shows that the larch samples are resistant to ignition for the selected experimental parameters. The other samples (pine, aspen), irrespective of geometry, are ignited by the combustion source. Figure 3, as an example, shows the thermograms of untreated pine wood (Fig. 3, a) and pine wood treated by a fire-retardant composition “FUKAM” (Fig. 3, b); untreated “blockhouse” sample (Fig. 3, c) and treated one by the antiseptic for wood “Pirilax-Classic” (Fig. 3, d); untreated aspen sample (Fig. 3e) and specimen treated by fire retardant “SENEZH OGNEBIO PROF” (Fig. 3, f); untreated larch sample (Fig. 3, g) and treated one by fire-retardant composition “MIG-09” (Fig. 3, h).

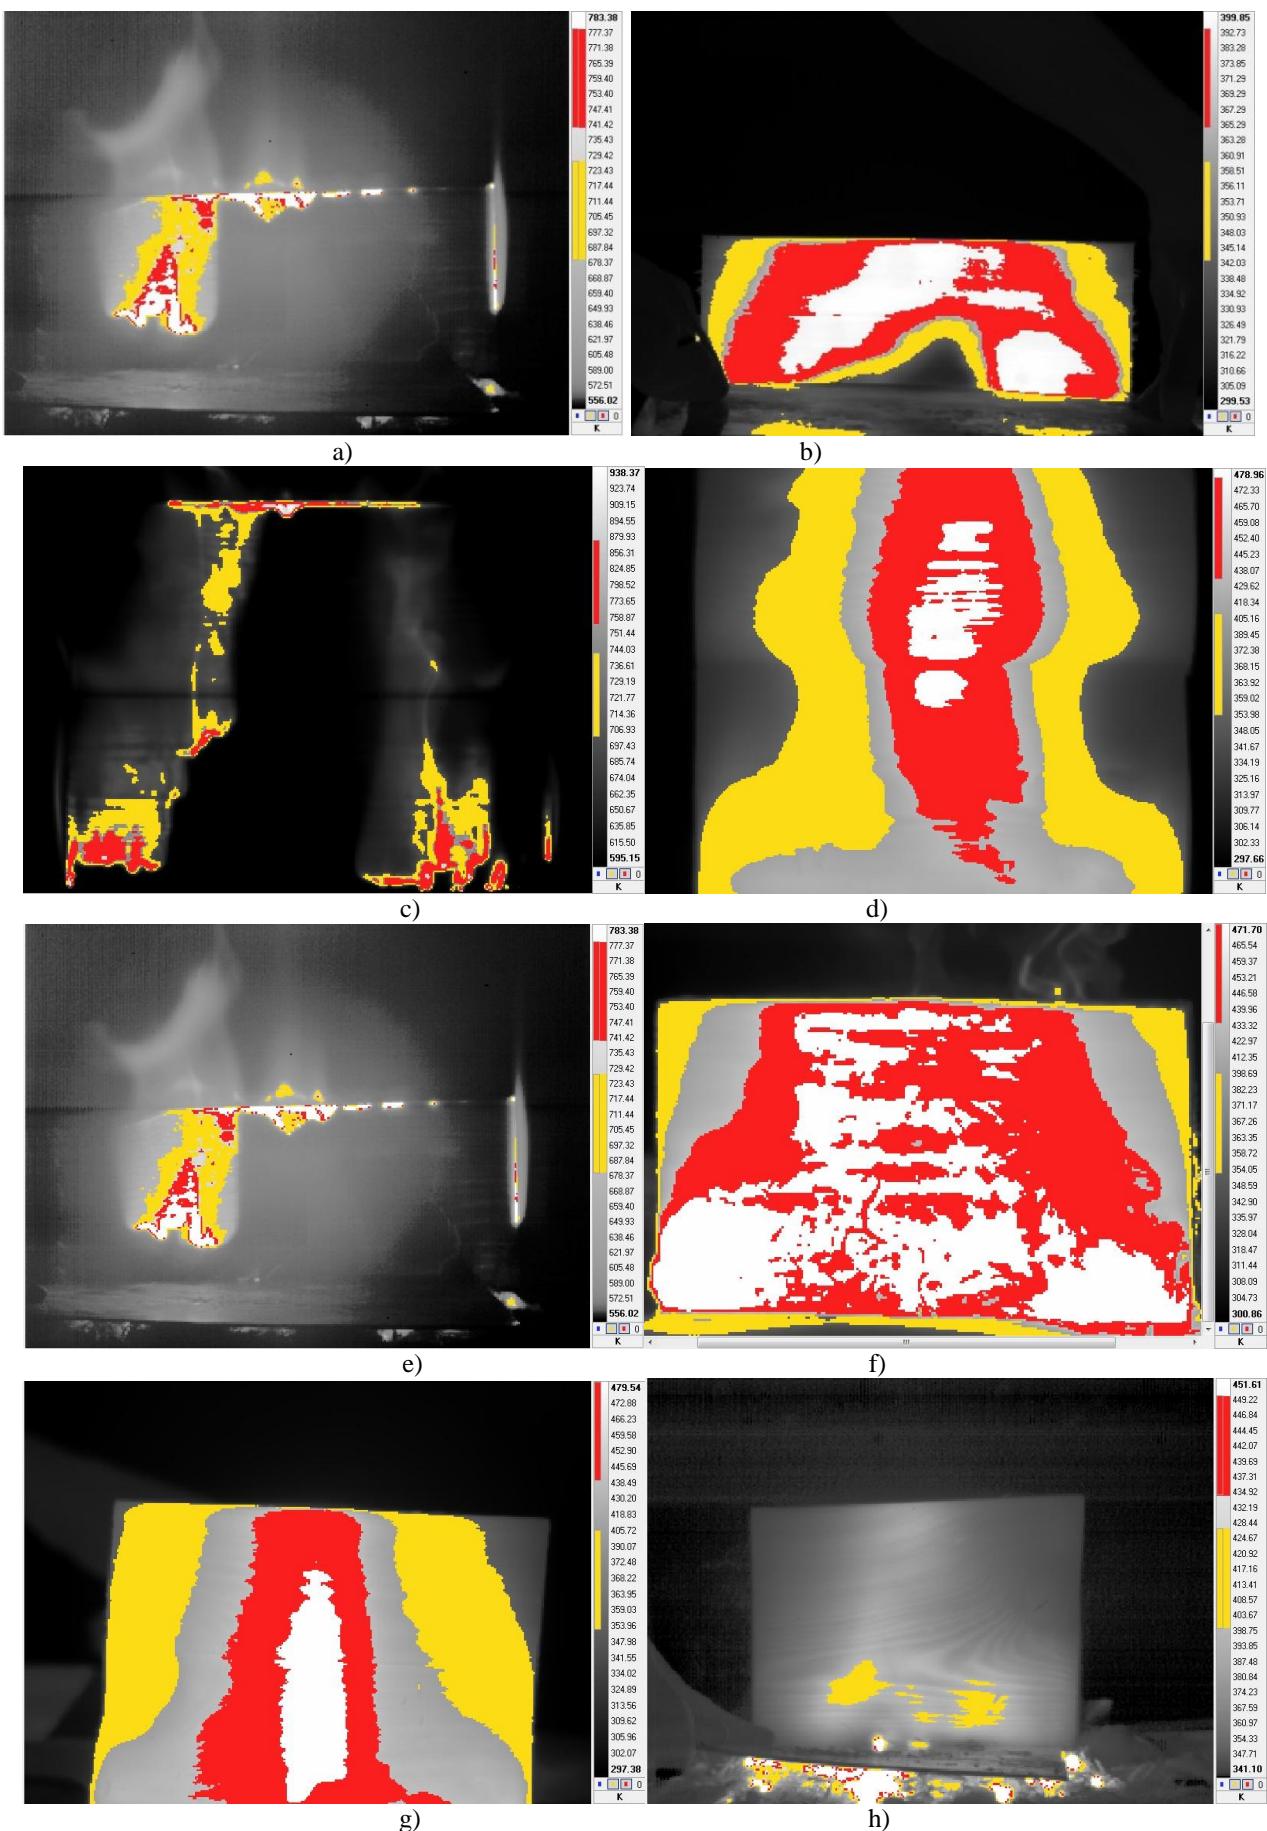


Fig. 3. Thermograms of sample surfaces after fire exposure

4. CONCLUSIONS

The influence of the various fire-retardant compositions (fire-bio retardant treatment for wood “FUKAM”, fire-retardant treatment with an antiseptic effect for wood “Pirilax-Classic”, protective means for wood “SENEZH OGNEBIO PROF”, fire-retardant composition “MIG-09”) was experimentally analyzed to study the fire-hazard characteristics for the wood samples of various geometry (flat pine, aspen and larch samples and wood building material for the imitation of a pine bar (Block House)). Comparative analysis shows that depending on the kind of wood the best fire-retardant characteristics are demonstrated by different compositions such as the fire-bio retardant treatment for wood «FUKAM» for the samples of block house; the fire-retardant treatment with an antiseptic effect for wood “Pirilax-Classic” for the building larch board; the protective means for wood “SENEZH OGNEBIO PROF” for the building pine and aspen board.

This work was carried out with financial support from President of Russian Federation grant MK – 3885.2018.8

REFERENCES

1. BARTLETT, A. I., HADDEN, R. M., BISBY, L. A., LAW, A. Analysis of cross-laminated timber charring rates upon exposure to nonstandard heating conditions. 14th International Conference and Exhibition, Proceedings. *Fire and Materials*, 2015, p. 667–681.
2. RESZKA, P., TORERO, J. L. In-depth temperature measurements in wood exposed to in-tense radiant energy. *Experimental Thermal and Fluid Science*, 2008, Vol. 32, No. 7, p. 1405–1411.
3. FRANGI, A., FONTANA, M., HUGI, E., JÜBSTL, R. Experimental analysis of cross-laminated timber panels in fire. *Fire Safety Journal*, 2009, Vol. 44 No. 8, p. 1078–1087.
4. BABRAUSKAS, V. Charring rate of wood as a tool for fire investigations. *Fire Safety Journal*, 2005, Vol. 40 No. 6, p. 528–554.
5. GRISHIN, A.M., FILKOV, A. I., LOBODA, E. L. et al. A field experiment on grass fire effects on wooden constructions and peat layer ignition. *International Journal of Wildland Fire*, 2014, Vol. 23, No. 3, p. 445–449.
6. KUZNETSOV, V. T., FIL'KOV, A.I. Ignition of various wood species by radiant energy. *Combustion, Explosion and Shock Waves*, 2011, Vol. 47 No. 1, p. 65–69.
7. SIVENKOV, Andrei B.; ASEEVA, Rosa M.; SERKOV, Boris B. *Combustion of wood and its fire hazard properties*. Academy of State Fire Service of the Ministry of Emergency Measures of Russia, 2010, 262 p. ISBN 978-5-9229-0045-4. (in Russian).
8. MEL'NIKOV, V. S., HASANOV I. R., KIRILLOV S. V. et al. Thermography of building elements and building structures during fire tests. *Fire Safety*, 2015, No. 3, p. 83–90. (in Russian).
9. VERMESI, I., DiDOMIZIO J. M., RICHTER F. et al. Pyrolysis and spontaneous ignition of wood under transient irradiation: Experiments and a-priori predictions. *Fire Safety Journal*, 2017, Vol. 91, p. 218–225.
10. PRAT-GUITART, N., BELCHER C. M., HADDEN R. et al. Infrared image analysis as a tool for studying the horizontal smoldering propagation of laboratory peat fires. *Coal and peat fires: A global perspective*. Publisher Elsevier, 2015, p. 121–139. ISBN 978-0-444-52858-2.
11. ZIMA, V. P., KASYMOV, D. P. Investigation of the Effect of the Combustion Site on Wood Specimens with the Use of IR Diagnostics. *Journal of Engineering Physics and Thermophysics*, 2016, Vol. 89, No. 2, p. 466–470.
12. GRISHIN, A. M., ZIMA, A. M., KASYMOV, D. P. Fire hazard system analysis of wood construction elements on exposure to wildfire. North of Russia: strategies and development

- pro-spects 2016. Materials of the II All-Russian Scientific and Practical Conference, 2016, p. 260–263. (in Russian).
13. VAVILOV, Vladimir. P. *Thermal/Infrared Nondestructive Testing*. NDT Handbooks series. Spectrum Publisher, 2009, Vol. 5, 450 p. ISBN 978-5-904270-03-2.
 14. AGAFONCEV, Michael V., KASYMOV, Denis P. *Actual problems of thermophysics and physical hydrodynamics*. Novosibirsk, 2016, 81–82 p. (in Russian).
 15. AGAFONCEV, M. V., KASYMOV, D. P. Investigation of the Fire Hazard Characteristics of Wood Using Infrared Thermography. *Proceedings of the 8th European Combustion Meeting..* Dubrovnik, Croatia, 2017- [referred on the 29th of September in 2017 y.]. Link to the internet <https://www.researchgate.net/publication/317040588_Inv%20estigation_of_the_Fire_Hazard_Chacteristics_of_Wood_Using_Infrared_Thermography>.
 16. Fire-bio protective composition "Fukam", [referred on the 5th of December in 2017 y.]. Link to the internet <<http://www.fukam.ru/English>>.
 17. Biopyrene (fire retardant antiseptic) "Pirilaks": instructions for use. «NORT». [referred on the 5th of December in 2017 y.]. Link to the internet <<https://www.nort-udm.ru/en/>>.
 18. Means protective for wood, instruction on application. [referred on the 12th of December in 2017 y.]. Link to the internet <http://www.strsezon.ru/ognebio_prof.pdf>. (in Russian).
 19. Biopyrene (flame retardant antiseptic) "Mig-09": instructions for use "NORT". [referred on the 12th of December in 2017 y.]. Link to the internet <<https://www.nort-udm.ru/en/>>.
 20. *GOST R 53292-2009. Fire-retardant compounds and substances for wood and materials based on it. General requirements. Test methods*. Moscow FRUP "Standartinform", 2009- [referred on the 12th of December in 2017 y.]. Link to the internet <<http://bpl32.ru/bank/normativnye-dokumenty/gost-r-53292.pdf>>. (in Russian).